

Platforms

Platforms - Decks

On this page


[What are some safety tips for decks on a scaffold?](#)

[What are the minimum recommendations for the deck?](#)


[How should decking be stored?](#)

What are some safety tips for decks on a scaffold?

- Use wooden and metal decks according to job requirements, standards, occupational health and safety regulations and manufacturer's instructions.

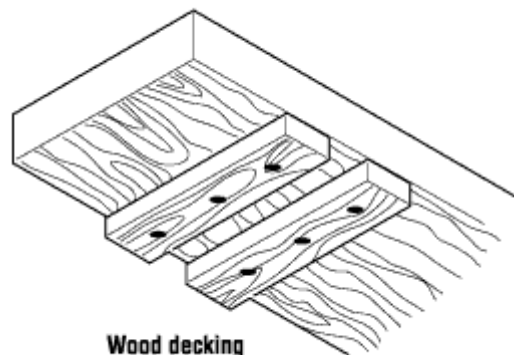

- Only cleat planks at the ends to prevent lengthwise movement. Wiring down planks can also prevent movement, provided the wire does not create a tripping hazard. Where planks overlap, rest the cleated end on the support. Do not use cleats elsewhere on the plank to prevent splitting.

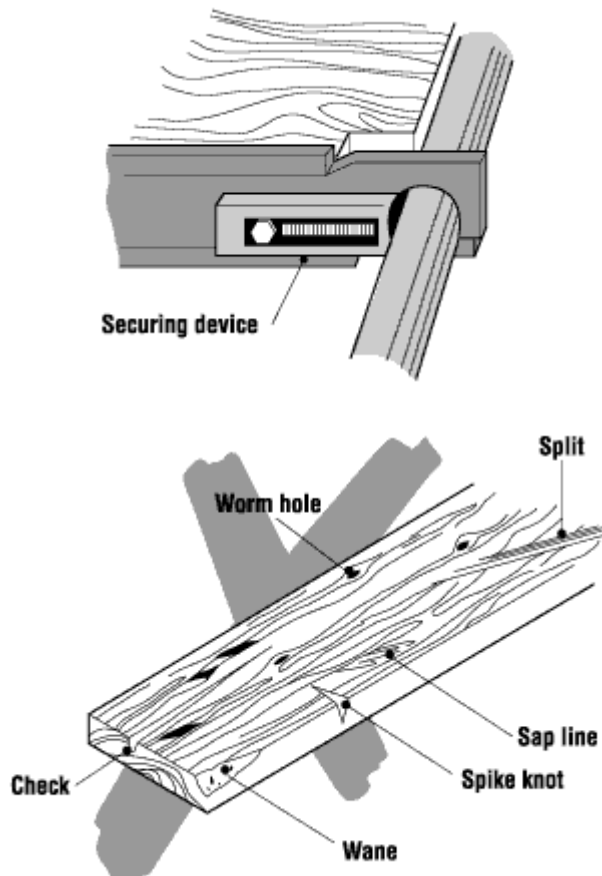

- Make sure that adjoining planks are of uniform thickness for an even platform.
- Lay planks side by side across the full width of the scaffold.
- Check scaffold planks for large knots, worm holes, steeply sloping grain at the edges, spike knots, and splits. Splits wider than 10 mm (3/8 in), lengthwise closer than 75 mm (3 in.) to the edge of the plank, or lengthwise longer than 1/2 the length of the plank is not acceptable. Discard any planks showing these or other defects immediately.
- Check hooks and hardware of prefabricated platform units regularly for looseness, distortion and cracks. Damage can occur if the platforms are dropped or thrown.
- Clean ice, snow, oil and grease off planks. Platform decks should be slip-resistant and should not accumulate water.
- Inspect planks on a regular basis while on the scaffold. Weather, rot, and general use can deteriorate the planks.
- Do not jump on the planks to test their strength. Jumping can cause undetectable damage.

What are the minimum recommendations for the deck?

- Make sure that all working platforms are about 500 mm (20 in.) minimum in width.

- Try to plank the entire working level of a scaffold for maximum support and stability. Use a minimum of 48 mm thick Number 1 Grade spruce-pine-fir (SPF) planking or better.
 - Overlap or extend planking should provide end support at a minimum of 150 mm (6 in.) to a maximum of 300 mm (12 in.) and cleat at each end to prevent planking from slipping and blowing off.
 - Support planks at intervals not exceeding 3m (10 ft) for light work and 2.1 m (7 ft.) for heavy work (bricklaying, masonry).
 - Check with your local [jurisdiction](#), as recommendations may vary.
-

How should decking be stored?

- Stack planks on a firm-level surface to prevent warping.
 - Band the ends of the boards. Do not paint, as the paint can conceal defects.
 - Do not use scaffold planks as a base to stack materials, as ramps, or as temporary roadways.
-

Fact sheet confirmed current: 2024-10-04

Fact sheet last revised: 2018-02-05

Disclaimer

Although every effort is made to ensure the accuracy, currency and completeness of the information, CCOHS does not guarantee, warrant, represent or undertake that the information provided is correct, accurate or current. CCOHS is not liable for any loss, claim, or demand arising directly or indirectly from any use or reliance upon the information.